

## Fashion Stainless Steel Best Watch straps Band for apple watch 42 mm 38 mm



### Design □

- Fit for all versions of Apple Watch Series 1/2/3
- Material: Stainless Steel
- Individualize your device with this unique item

### Features □

1. Custom designed to fit device perfectly
2. Refined dual fold-over clasp with unique button
3. The metal clasp firmly closed, prevent loosen automatically, safe and beautiful,

Service □ OEM & ODM Order Acceptable for Low MOQ

Shipment □ Air or Sea Shipment

Payment □ TT / Paypal / Western Union/ Cash / LC

Packaging □ Nice Retail Package or Customs Packaging Available

Shenzhen Climber Technology Co., Ltd. is specialized in designing and producing Smart Watch Straps, such as Leather Strap, Stainless steel Bands, Silicone Bracelet or so on. Compatible For Apple Watch, Xiaomi Band, Fitbit, Samsung Gear, etc. Fashionable style, suitable for grand events like Business, Wedding, Anniversary, Valentine's Day, Party, etc

Welcome OEM & ODM order, we will try our best to meet all customers' different requirements. We have rich experience to supply all accessories to online sellers. We know how to do labeling, packing for all your goods ship directly to FBA warehouse. High Clear Product Pictures surely offer when you order.

## Folding safety buckle

Fasten firmly, no distortion, integrity, beauty and elegance, easy to repair.







## Adjustable Strap

You can adjust the length of the strap with the link pin remover to fit your wrist in most comfortable condition.

## Secure Attachment

2 sturdy clips connect the wristband with the Apple Watch, safe & secure at all times.



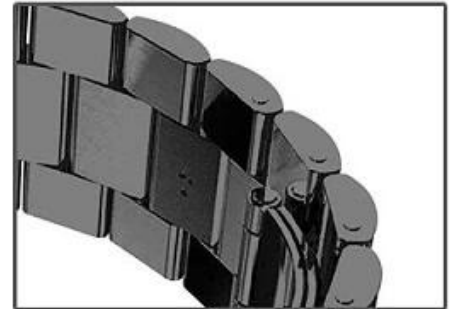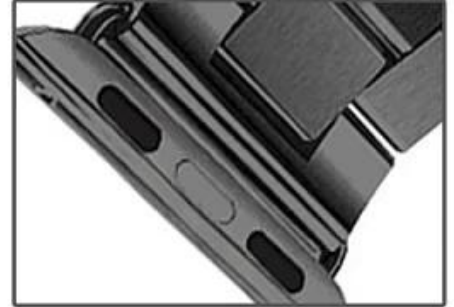





# Assembly Instructions

1. Prepare the link remover and watch band.



2. Align the pin of the link remover with 1 of the link holes and insert it into link holes.



3. Twist clockwise the link remover to press the link bar out. And then pull out the link bar out of it with your hands.



4. Disassemble another link with the same step.



5. Assemble links. Put 1 of the rod end to the hole inside another link, then align the 2 links.



6. Use the link remover to push the elastic rod in so the link will go into another. Slightly adjust the link position until they locked firmly.

